
# Panel PC

- Equipped with 4-core ARM architecture A55 processor and Android 12 operating system
- 21.5-inch flat capacitive touch panel with high impact resistance
- Fanless design, excellent in heat dissipation and strong stability performance
- Wide voltage and temperature working performance, perfect for 24/7 use in all weather conditions
- Rich interfaces, including multiple USB/RS232/LAN/HDMI and other I/O ports, easily meet various scenario requirements
- Equipped with a M.2 port for point-to-point serial connection, it can expand the 4G communication module, HDD and other peripherals
- Standard PPC mounting hook component, easy to install and supports various installation methods such as embedded and wall-mounted



RK3568 Quad core



WiFi




Android 12 **Operating System** 



Running 24/7 without affecting reliability



21.5 inch screen



**Rich interface** extensions




250cd/m<sup>2</sup> Brightness



storage expansion



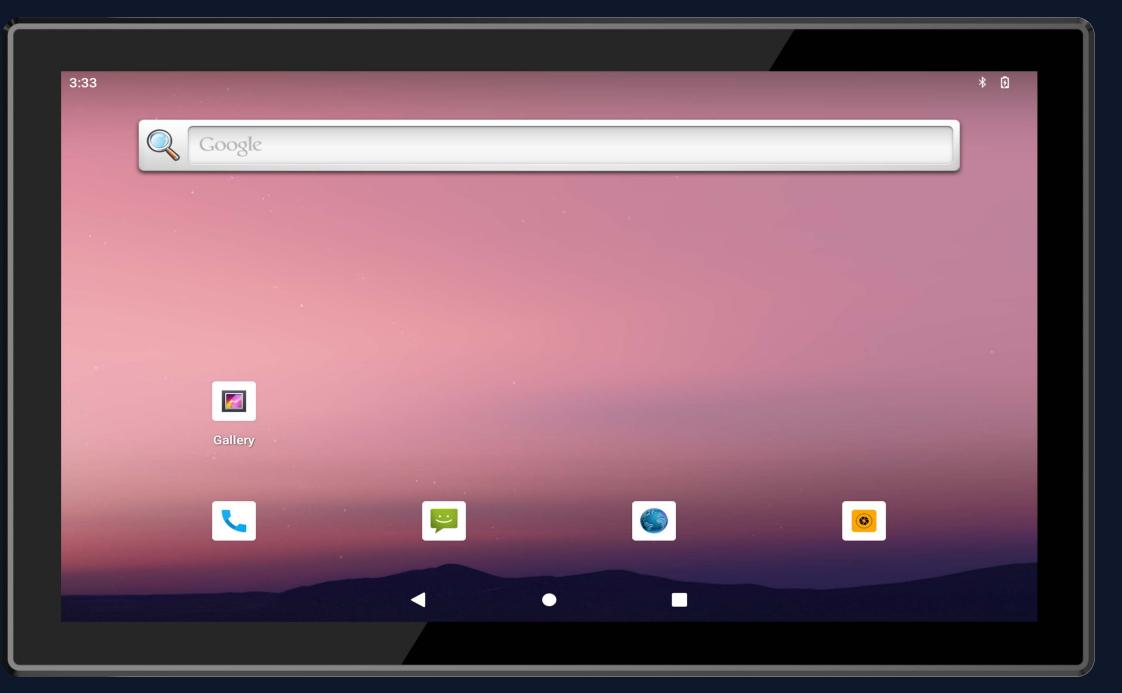





IP65

1920\*1080

Screen resolution

## **INERUgged**

## Panel PC P21R Specifications





**Operating System** 

E

### **Dimension/Weight**

537.02 x 324.02 x 57.60 mm 5.05 kg



Internet

Optional 4G/Dual-band WiFi/BT5.0



### I/O Interface

Standard USB-A USB3.0\*1, USB3.0\*1 OTG, USB 2.0\*2 Power interface DC IN 12V-24V Power connector \*1" Standard Earphone Jack \*1 RJ45 \*1 (10M/100M/1000M adaptive) DB9 PORT RS232 \*2 HDMI \*1



Search Control Con www.onerugged.com



#### Memory

RAM: 4GB onboard ROM: 64GB



#### Display

Type: LCD Size: 21.5 inch 16:9 Resolution: 1920x1080 Brightness: 250 cd/m<sup>2</sup>





#### **Rugged Features**

Working temperature: -20 °C to 60 °C Storage temperature: -30 °C to 70 °C Humidity: 95% Non-Condensing



\* The technical specifications of this product are subject to change without prior notice

#### ⊠ inquiry@onerugged.com

🖉 Room 401, Building C, Chaojie Industrial Park, No. 1 Guanghui Road, Jinsha Community, Kengzi Street, Pingshan District, Shenzhen, China

## **INERUgged**



#### **Touch Pannel** 10 PCAP, G+G



#### 🖉 Adapter

AC100V ~ 240V、 50Hz/60Hz output DC 12V/4A