



Panel Touch Display

- Featured a 15.6-inch expansive display, up to 170° viewing angles;
- Industrial-grade screen, with a resolution of 1920×1080;
- Supports 10-point capacitive touch, same frequency without delay;
- Supports HDMI, VGA (Analog RGB), and DVI interface types;
- Optional wall-mounted installation or embedded Installation;
- -20°C-60°C wide temperature operation, stable in harsh scenarios;
- With a durable metal body and an IP65-rated flat panel.



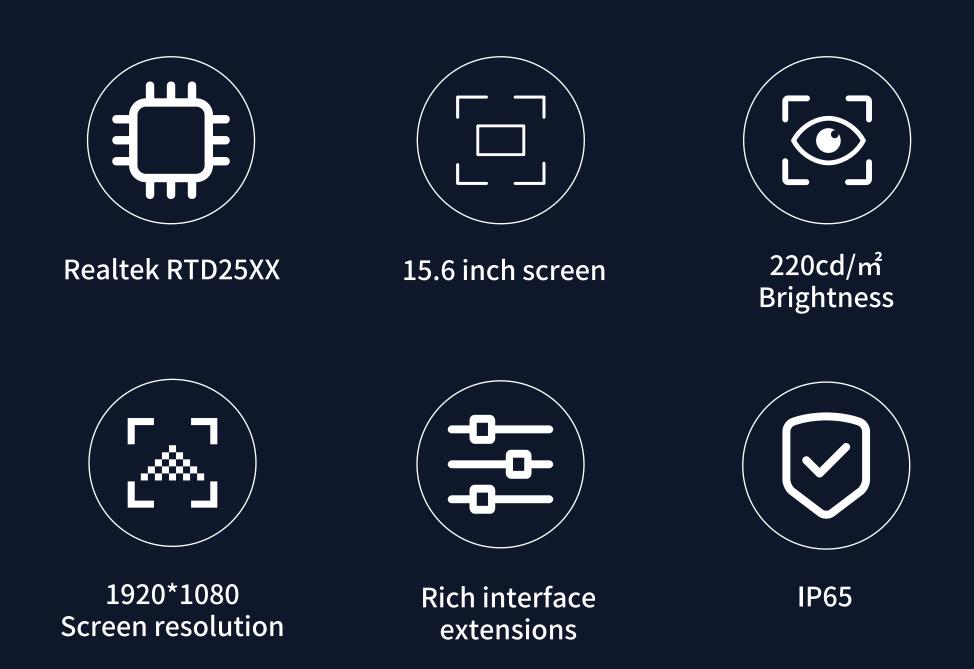

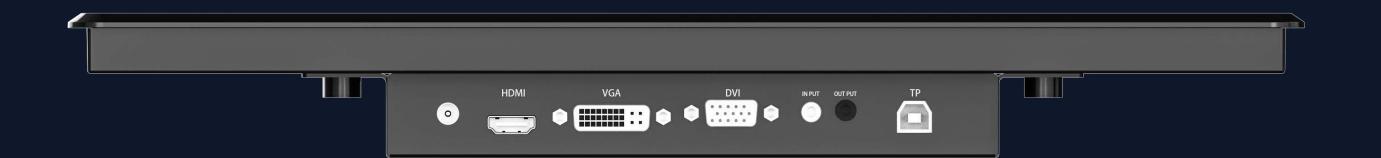



Panel Touch Display PT15 Specifications



Realtek RTD25XX



Type: LCD Size: 15.6 inch 16:9 Resolution: 1920x1080 Brightness: 220cd/m²



Touch Pannel

10 point capacitive touch (Optional without touch control)



388.63x248.43x54.95 mm



Black



Galvanized Sheet



□ I/O Interface

Power Interface DC 12V *1 USB TYPE-B (TP Port) VGA *1(Analog RGB) HDMI *1(Up to 1920*1080@60Hz) DVI *1(Up to 1920*1080@60Hz) ∮ 3.5mm Standard AUDIO Port *1 ∮ 3.5mm Standard Earphone Jack *1



Rugged Features

Working temperature: -20°C to 60°C Storage temperature: -30°C to 70°C Humidity: 95% Non-Condensing



IP65 Front Panel












Panel Touch Display PT15 Product Six Views



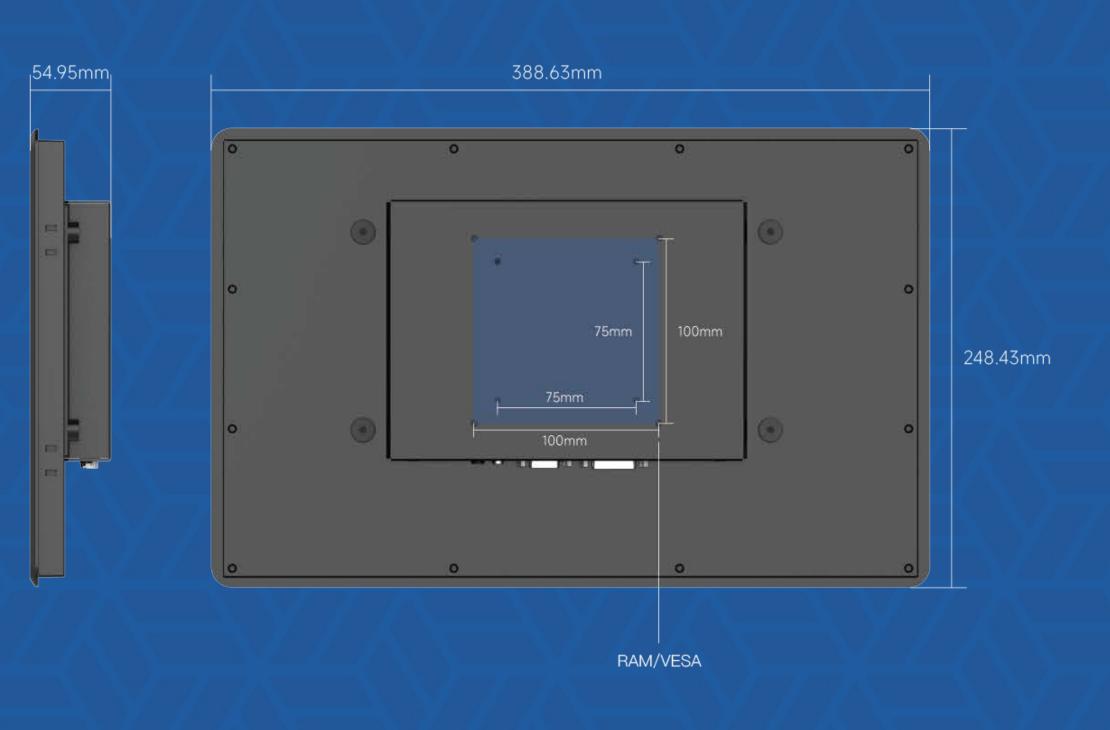

Accessories



12V/4A adapter



PPC_ Hook assembly *4

* The technical specifications of this product are subject to change without prior notice



© Tel: 400-830-4882

www.onerugged.com

□ inquiry@onerugged.com

Room 401, Building C, Chaojie Industrial Park, No. 1 Guanghui Road, Jinsha Community, Kengzi Street, Pingshan District, Shenzhen, China